




Tech Data Sheet

Features

- Pumps come close coupled to standard 0.37kW, 415 Volt motor. (option: 240V)
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 25mm suction & 25mm discharge flanged ports

Model	350PW (S)	350PW (M)	350PW (H)
Impeller size (mm)	107	101	94
Liquid SG	1.0	1.3	1.5
Speed (rpm)	2900	2900	2900

Performance Curves

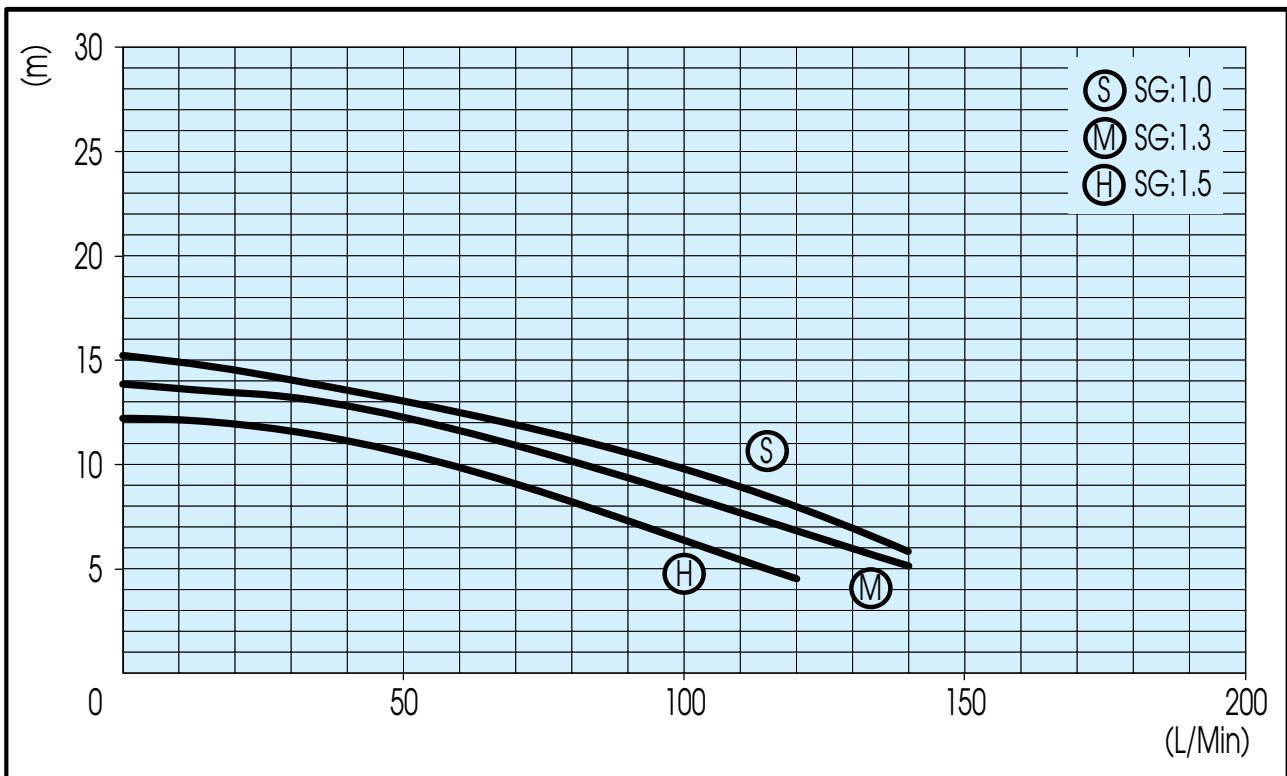

Dimensions

