




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 4.0kW, 415 Volt motor.
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 65mm suction & 50mm discharge ports for flange and 2½" suction & 2" discharge for BSP threaded

| Model              | 505PW(H)(S) | 505PW(H)(L) | 505PW(H)(M) | 505PW(H)(H) |
|--------------------|-------------|-------------|-------------|-------------|
| Impeller size (mm) | 168         | 163         | 154         | 146.5       |
| Liquid SG          | 1.0         | 1.1         | 1.3         | 1.5         |
| Speed (rpm)        | 2900        | 2900        | 2900        | 2900        |

### Performance Curves

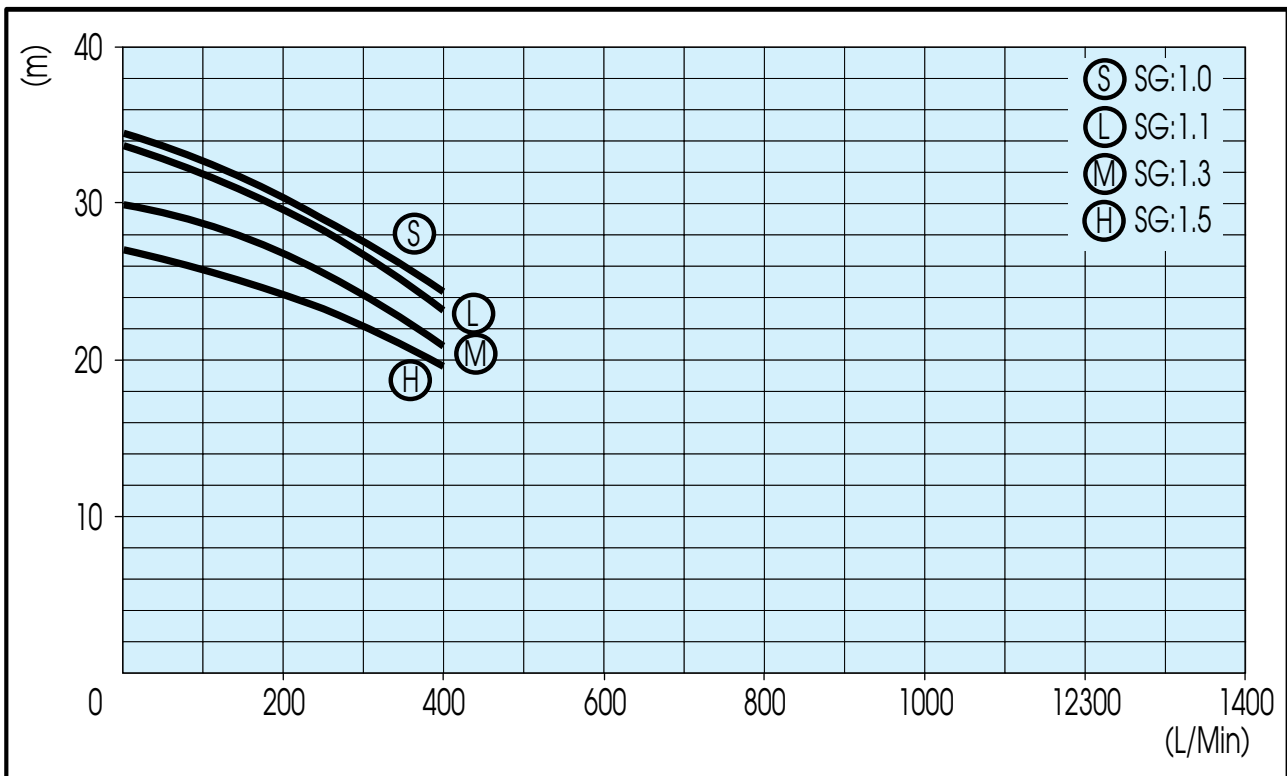

### Dimensions

