

Tech Data Sheet




Features

- Pumps come close coupled to standard 4.0kW, 415 Volt motor.
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 65mm suction & 50mm discharge ports for flange and 2½" suction & 2" discharge for BSP threaded

| Model | 505PW(L)(S) | 505PW(L)(L) | 505PW(L)(M) | 505PW(L)(H) |
|--------------------|-------------|-------------|-------------|-------------|
| Impeller size (mm) | 140.5 | 135.5 | 129 | 123 |
| Liquid SG | 1.0 | 1.1 | 1.3 | 1.5 |
| Speed (rpm) | 2800 | 2800 | 2800 | 2800 |

Performance Curves

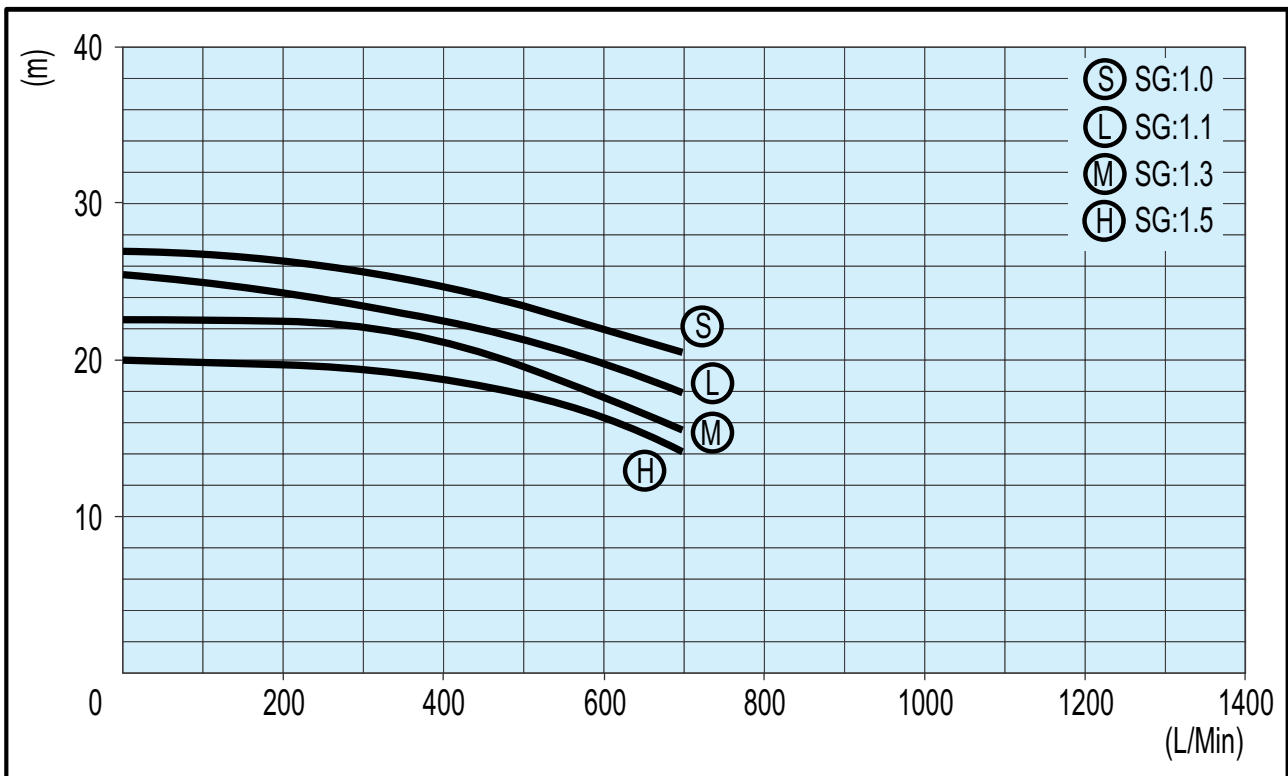

Dimensions

